


# HEAVY-END HYDROCARBONS

**OIL & FLUID**  
CONDITION MONITORING  
**SAMPLE KITS**

Test	Unite	Test method	Guaranty range	Result
Density @ 15 °C	Kg/m3	ASTM D86	805 Max	798
Distillation Range (°C)				
IBP	°C	ASTM D86	140 Min	143
10	°C	ASTM D86	160-170	164
20	°C	ASTM D86	170-180	175
30	°C	ASTM D86	180-190	185
40	°C	ASTM D86	190-200	196
50	°C	ASTM D86	205-215	208
60	°C	ASTM D86	215-225	222
70	°C	ASTM D86	232-242	237
80	°C	ASTM D86	248-258	255
90	°C	ASTM D86	277-287	282
FBP	°C	ASTM D86	339 Max	331
Viscosity Kinematic	@100 °C	ASTM D445	0.65-0.75	0.73
Flash point (open Cup)	°C	ASTM D92	40-50	43
Pour Point	°C	ASTM D97	< - 30	< - 30
Colour	Number	ASTM D1500	1-2	1.5
Copper Corrosion	3hrs @50 °C ppm	ASTM D130	-	1a
Total Sulfur	ppm	ASTM D4292	<5200	4941
Mercaptan Content	ppm	ASTM D3227	<200	143
Chlorine Content	Mg/L	ASTM D4929	0	0
Cetane index	Number	ASTM D4737	45-55	50

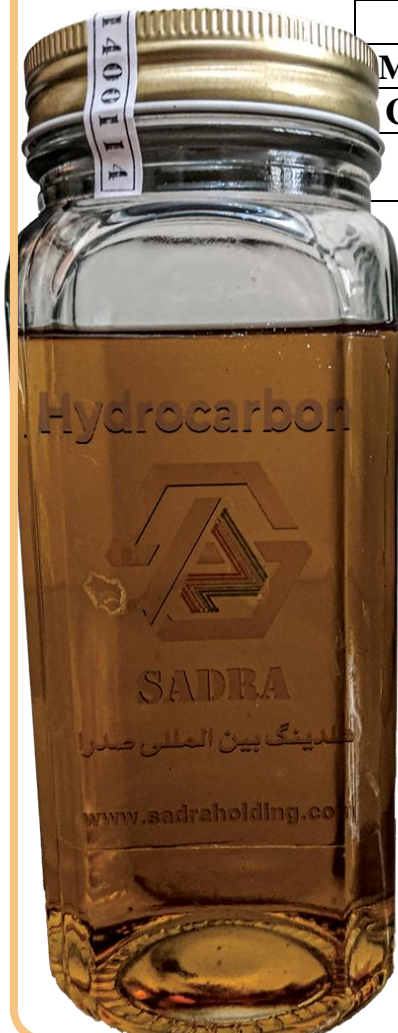

## Heavy-end hydrocarbons

Sadra International Holding

Site: <https://www.sadraholding.com>

Email: [info@sadraholding.com](mailto:info@sadraholding.com)

Office: +98-7644455111

Fax: +98-7644455222

Whats\_app numbers: +98-9120920617



**SADRA** SCAN ME



Sample code: 1400114

